


PROTERMSTEP ALL

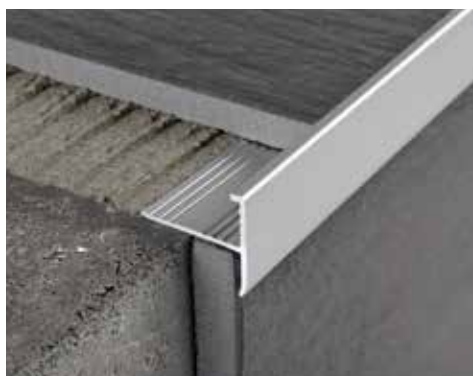

DESCRIPTION

PROTERMSTEP ALL is a profile in aluminium for stairs that protects the edges of the tread and cover the joint between step rise and tread. Its special geometry makes it an elegant and valued profile also in case of modern stairs.

MATERIAL

PROTERMSTEP ALL is a profile in anodized silver aluminium for stairs. It is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The profile, with a visible vertical surface of 19 - 21 - 23.5 and 26 mm, is available in the heights of 8 - 10 / 10 - 10 / 12.5 - 10 and 10 - 15 mm. It could be used overturned of 180°; for this reason every profile is therefore suitable for two different thicknesses of tiles. Its particular geometry and the availability of different heights, make **PROTERMSTEP ALL** a much-sought after and easy to lay profile.

AREAS OF USE

PROTERMSTEP ALL in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

WARNINGS

Do not use **PROTERMSTEP ALL** in anodized aluminium outdoors and in environments where aggressive sub-



stances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

MAINTENANCE

PROTERMSTEP ALL does not require any special maintenance. It is recommended to clean it with normal household cleaning products.

INSTALLATION INSTRUCTIONS

1. Choose "**PROTERMSTEP ALL**" according to the tile thickness.
2. Lay the tiles on the step rise and apply the adhesive on the area of the step tread, where the profile will be laid.
3. Fill in the cavities on the bottom of the structure and lay the profile on the step tread, resting it on the tiles of the rise covering.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

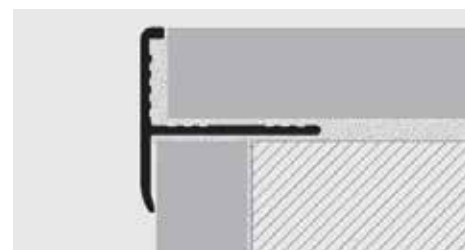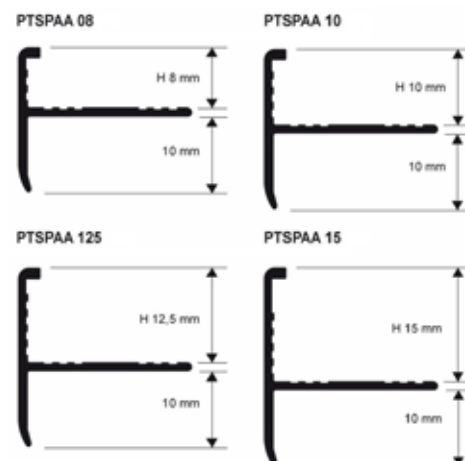

TEXT TEMPLATE FOR TENDERS

Supply and installation of profile for stair in anodized silver aluminium. It is equipped with a punched flange that guarantees a perfect grip to the adhesive. The profile, with a height of 8 - 10 / 10 - 10 / 12.5 - 10 / 10 - 15 mm, has a vertical visible surface of 19 - 21 - 23.5 / 26, like **PROTERMSTEP ALL** of the Progress Profiles company.

PTSP... 08 / 10 / 125 / 15: Anodized silver aluminium.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt